



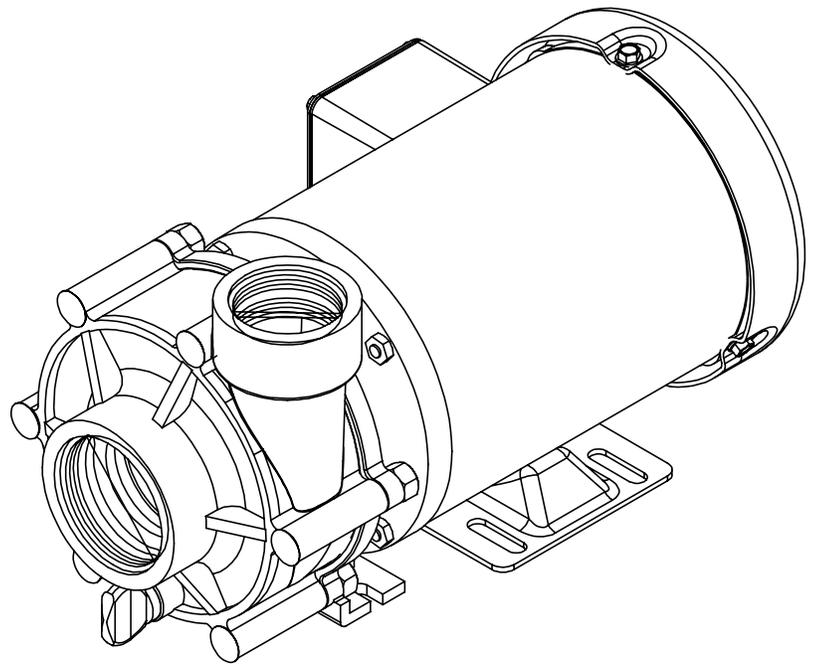

EX Series - EX3600


This compact series delivers big flow for little power. Great for smaller and simple ponds (3,000 gallons or less). The motor is totally enclosed and fan cooled for durability. 115V only. 18 month limited warranty. Supplied with an 8' power cord. Made in USA.

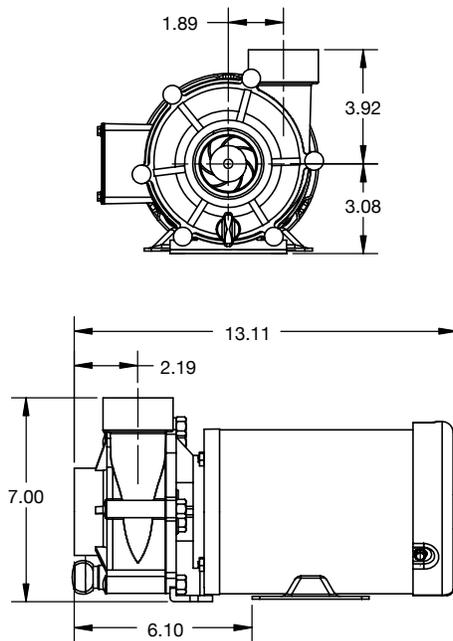

Flow At Total Dynamic Head

Model	Max Flow GPH	Max Head Feet	Max Power Watts	Max Current Amps	Flow	4'	6'	8'	10'	Voltage	Motor Enclosure
EX3600	3600	12'	139	1.4	GPM	60	53	44	34	115	TEFC
Inlet 2" fpt		Discharge 1 1/2" fpt		GPH	3600	3180	2640	2040			



EX3600

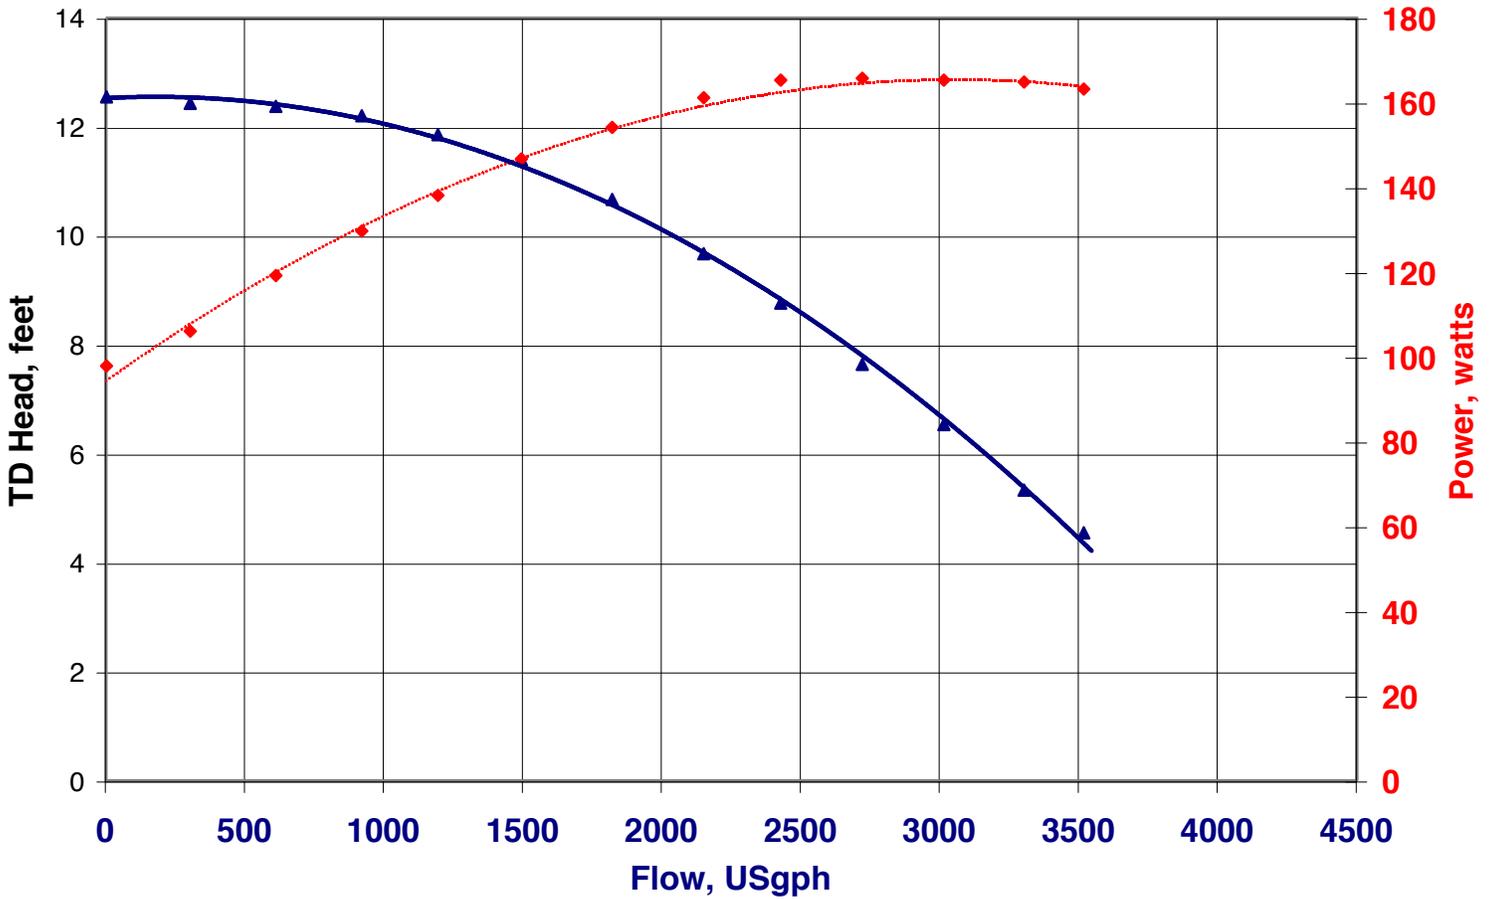




EX Series - EX4500

The EX Series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds. Motor is totally-enclosed, fan-cooled for durability. 115V or 230V. 18 month limited warranty. Supplied with an 8-foot, 115V cordset. Made in USA.

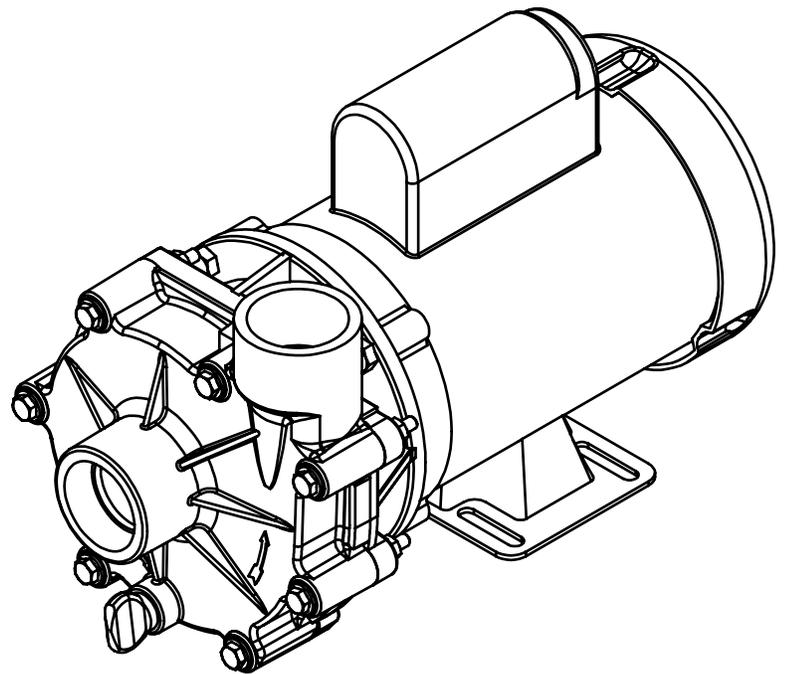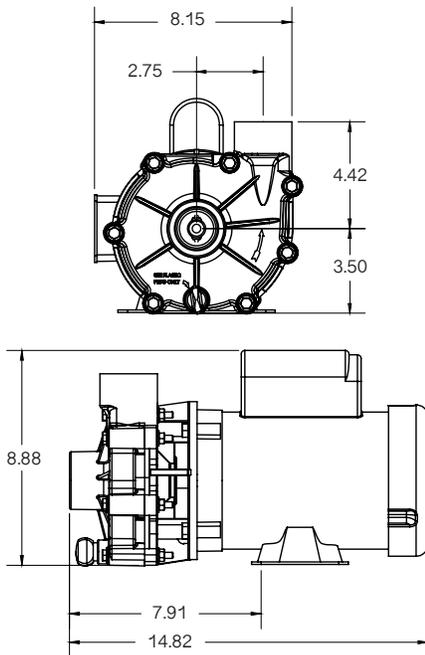

Flow At Total Dynamic Head



Model	Max Flow GPH	Max Head Feet	Max Power Watts	Max Current Amps	Flow	5'	10'	15'	20'	Voltage	Motor Enclosure
EX4500	4500	21'	253	2.2	GPM	67	56	41	15	115	TEFC
Inlet & Discharge 1 1/2" fpt					GPH	4020	3360	2460	900		

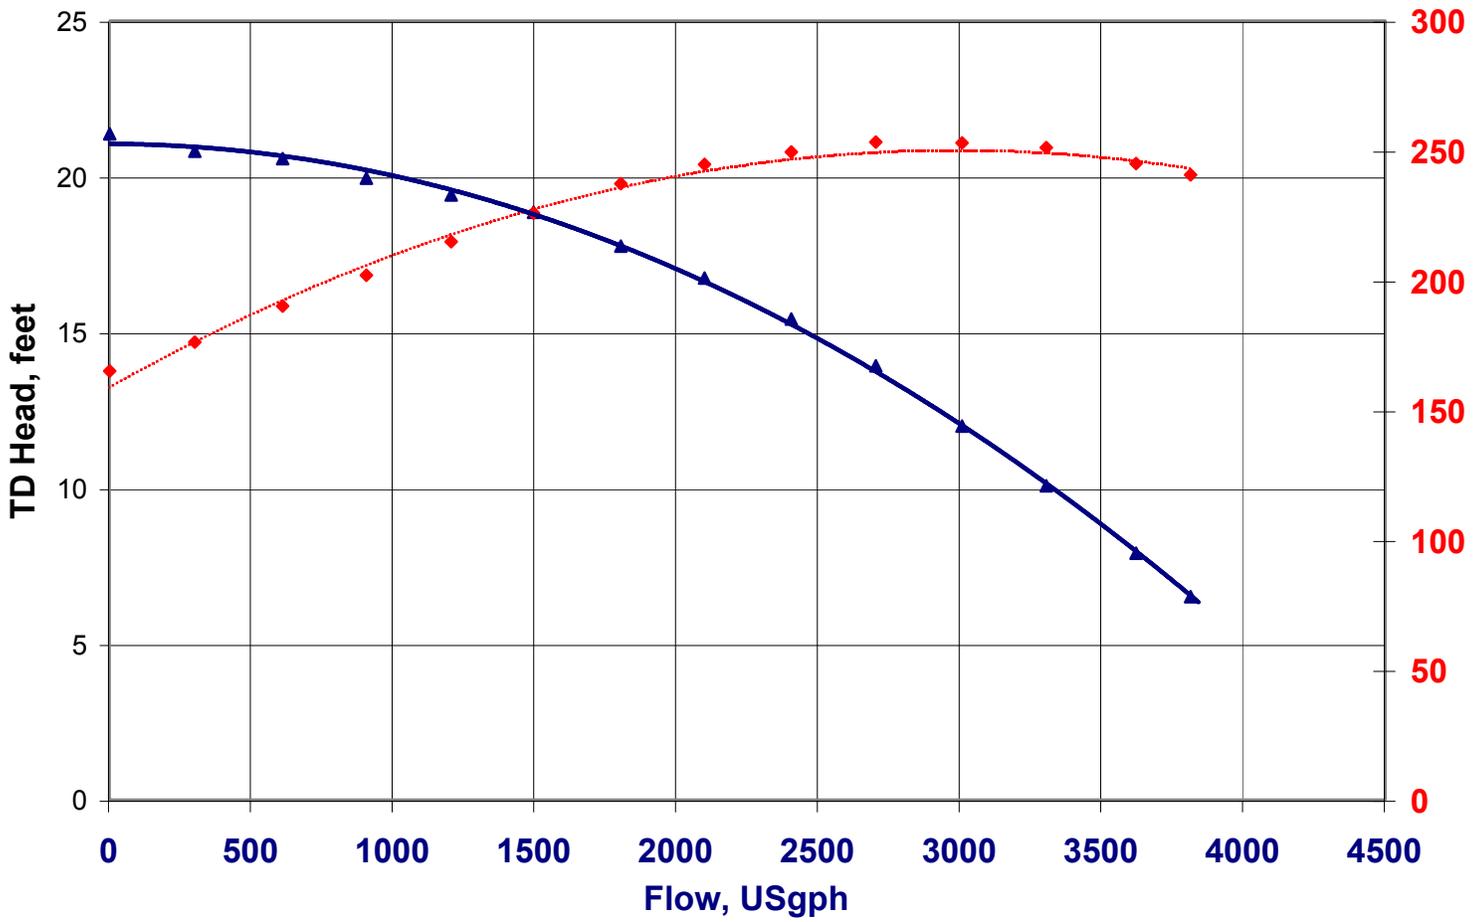




EX Series - EX6100

The EX Series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds. Motor is totally-enclosed, fan-cooled for durability. 115V or 230V. 18 month limited warranty. Supplied with an 8-foot, 115V powercord. Made in USA.

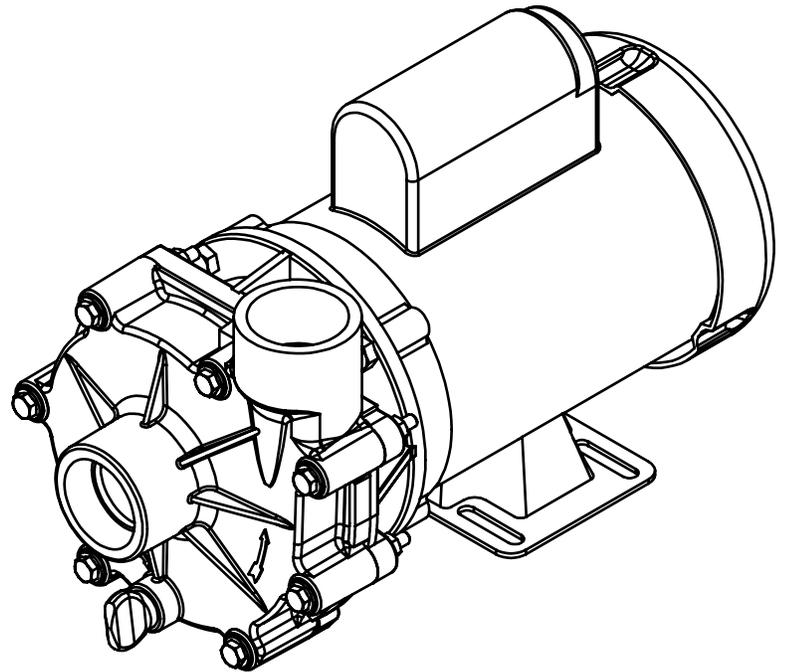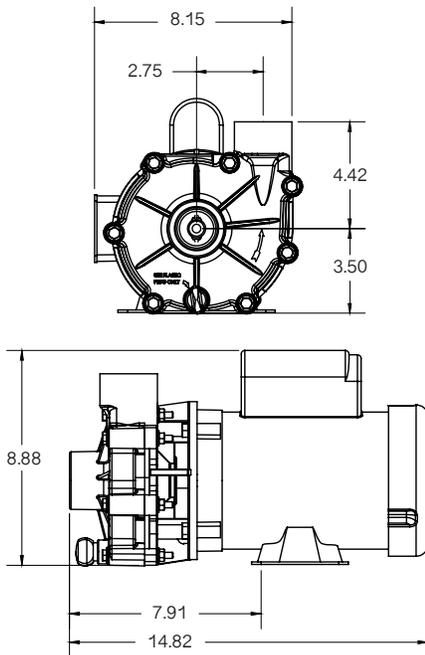


Flow At Total Dynamic Head

Model	Max Flow GPH	Max Head Feet	Max Power Watts	Max Current Amps	Flow	Flow At Total Dynamic Head				Voltage	Motor Enclosure
						5'	10'	15'	20'		
EX6100	6100	23'	344	3	GPM	92	79	65	40	115	TEFC
Inlet & Discharge 1 1/2" fpt					GPH	5520	4740	3900	2400		

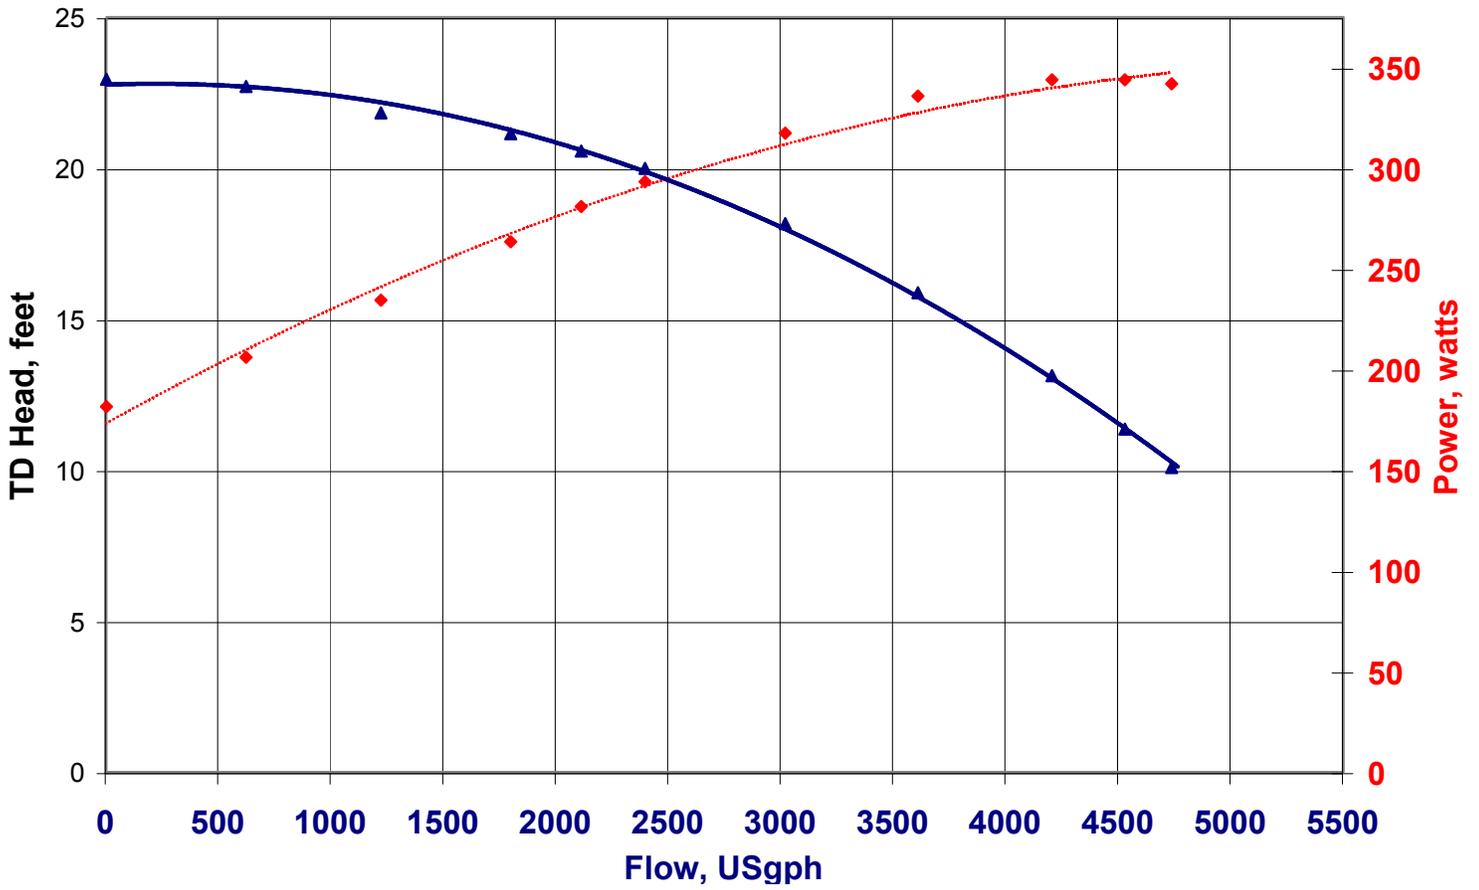


EX Series - EX8800

This expansive design will meet today's increased market demand for performance on all levels. Peak performance of 8220 gallons per hour while only requiring 450 watts! The EX8800 is supplied complete with 2" FPT and buttress thread ports and unions for ease of use. 3 year limited warranty. Made in USA. Supplied with an 8-foot, 115V powercord.

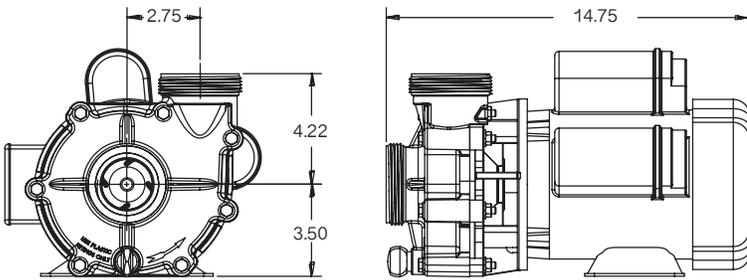

*Dimensions and illustrations are approximate and for reference only

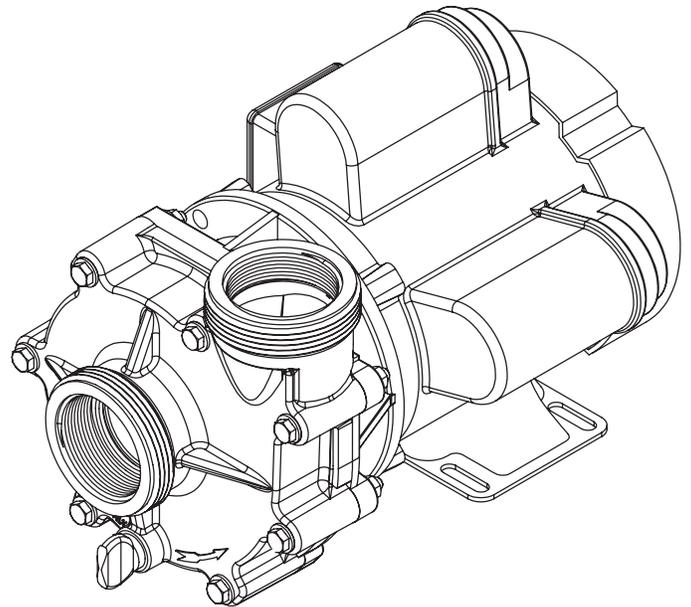

Flow At Total Dynamic Head

Model	Max Flow GPH	Max Head Feet	Max Power Watts	Max Current Amps	Flow	Flow At Total Dynamic Head				Voltage	Motor Enclosure
						5'	10'	15'	20'		
EX8800	8220	22.3'	450	4.0	GPM	120	103	84	48	115	TEFC
Inlet & Discharge 2" union or fpt					GPH	7200	6180	5040	2880		

